



# Liquid Control™ PR70

Meter, Mix and Dispense System with Graco Control Architecture™



## Advanced Two-Component Dispensing at an Affordable Price

- Proven ratio accuracy to  $\pm 1\%$
- Exceptional performance with material ratios from 1:1 to 12:1
- Versatile – ideal for applications using up to 70 cc shot sizes
- Improved pump design for increased seal life and less maintenance
- Intuitive user interface

PROVEN QUALITY. LEADING TECHNOLOGY.

# PR70 ... Technology You Can Count On

## Graco Reliability. Industry-Proven Accuracy. Intuitive Design.

The PR70 fixed ratio system accurately meters, mixes and dispenses two-component medium-to-low viscosity materials

for potting, gasketing, sealing, encapsulation and syringe filling. All the features you need, in a compact, modular design.

### Long-Life Design

Optimized pump support, seal design, and Chromex™ rods provide twice the life of existing systems.



### Graco Control Architecture Fluid Control Board (FCB)

FCB module offers a simplified wiring system and board-level diagnostics. Modular approach is easier to operate, easier to maintain.



### Multiple Feed Systems

A wide variety of supply systems including PE, SST and off-board tanks.

### MD2 Valve

High-pressure accuracy with multiple seat styles and adjustable snuffback for clean, precise dispensing.

### Compact Benchtop Unit

Stable, strong machine base for secure installation and a small footprint.

### Intuitive User Interface

Digital shot size entry, machine monitoring and feedback for total control.

### Proven Ratio Accuracy

Multiple tube sizes to pinpoint specific target ratios and deliver ratio accuracy to  $\pm 1\%$ .



# Performance You Can Trust



## Reliability and durability to maximize system performance

- Cast pump bodies for improved seal alignment
- Chromex shafts and Severe Duty™ cylinders combined with stainless steel fittings provide long pump life with no corrosion
- Shaft seals designed for extended life and easy replacement
- Preventative maintenance counter to plan system rebuilds around your production schedule
- Linear thrust bearings eliminate side loading to maximize seal life and performance

## Quick system training and lower mean time to repairs

- Standard electronic controls allow for digital shot entry in grams
- Built-in, easy to set up purge timer keeps system up and production running
- Graco Control Architecture modules, with built-in diagnostics, allow for quick troubleshooting
- Modular design eliminate point-to-point wiring — a quick board change-out gets your system up and running

## Performance and accuracy to handle the toughest materials

- Stainless steel design reduces the chance of a material incompatibility
- Positive displacement pumps deliver  $\pm 1\%$  ratio accuracy
- Linear transducer monitors piston velocity to provide ratio assurance and reduce scrap and re-work
- Shot size ranges from 2 to 70 cc's
- Ratio range from 1:1 to 12:1

## PR70 Key Industries and Applications

- ✓ Automotive Electronics
- ✓ Consumer Electronics
- ✓ Medical
- ✓ Sporting Goods
- ✓ Automotive Components
- ✓ Appliance
- ✓ Product Assembly
- ✓ And More!

# Easy-to-Use Interface



Graco Control Architecture Display

## Intuitive Operator Controls

- Simple system electronic controls with diagnostics and job data reporting
- LCD graphical user interface saves time by enabling accurate shot size programming
- Automatic alarms notify you when pumps need attention
- Schedule preventative maintenance at your convenience for less downtime



Shot size entry screen – enter up to five different shot sizes



Operation screen displays current shot, material availability and pump ready indicators

## A range of feed package options available for agitation, heat and degassing applications

Standard tank sizes simplify your system options.

Choose from:

- 3.0 and 7.5 liter stainless steel direct-mount tanks
- 8 liter direct-mount polyethylene (PE) tanks
- 7.5 and 15 gallon stainless steel off-board tanks
- Material conditioning options – multiple covers available for agitation, degassing or dessicant packs. Dust covers also available



Off-board tanks for high volume applications and fewer material refills



Stainless Steel (SST) Tanks



Polyethylene (PE) Tanks



# MD2: Part of a Complete System

## Micro Dispensing ... We've Got You Covered!

- Handles a range of materials
- Minimizes maintenance time and costs while maximizing dispense time
- Designed with fewer parts and is easy to clean
- Streamlines maintenance and service
- Complete modular design adapts to different installation needs
- No unique tools required

### *Independent Air Cylinder*

Improves mean time to repair (MTTR)

### *All-SST Wetted Section*

Maximizes material compatibility

### *Two Nose Options*

Customizes material mixing

### *Grease Isolation Chamber*

- Ideal for moisture-sensitive materials
- Accessible grease fittings for easy maintenance

### *Adjustable Inlet Position*

- Flexibility during system installation
- Minimizes dead spaces in fluid path

### *Adjustable Snuff-back Control*

Dispenses material only where you need it

### *Chromex Shafts*

Extends shaft life to better handle abrasive materials




*Manual Dispense  
Gun Option*

# PR70 Configurator

## Building the Perfect PR70 is Easy!

Customize the PR70 with the features you need.

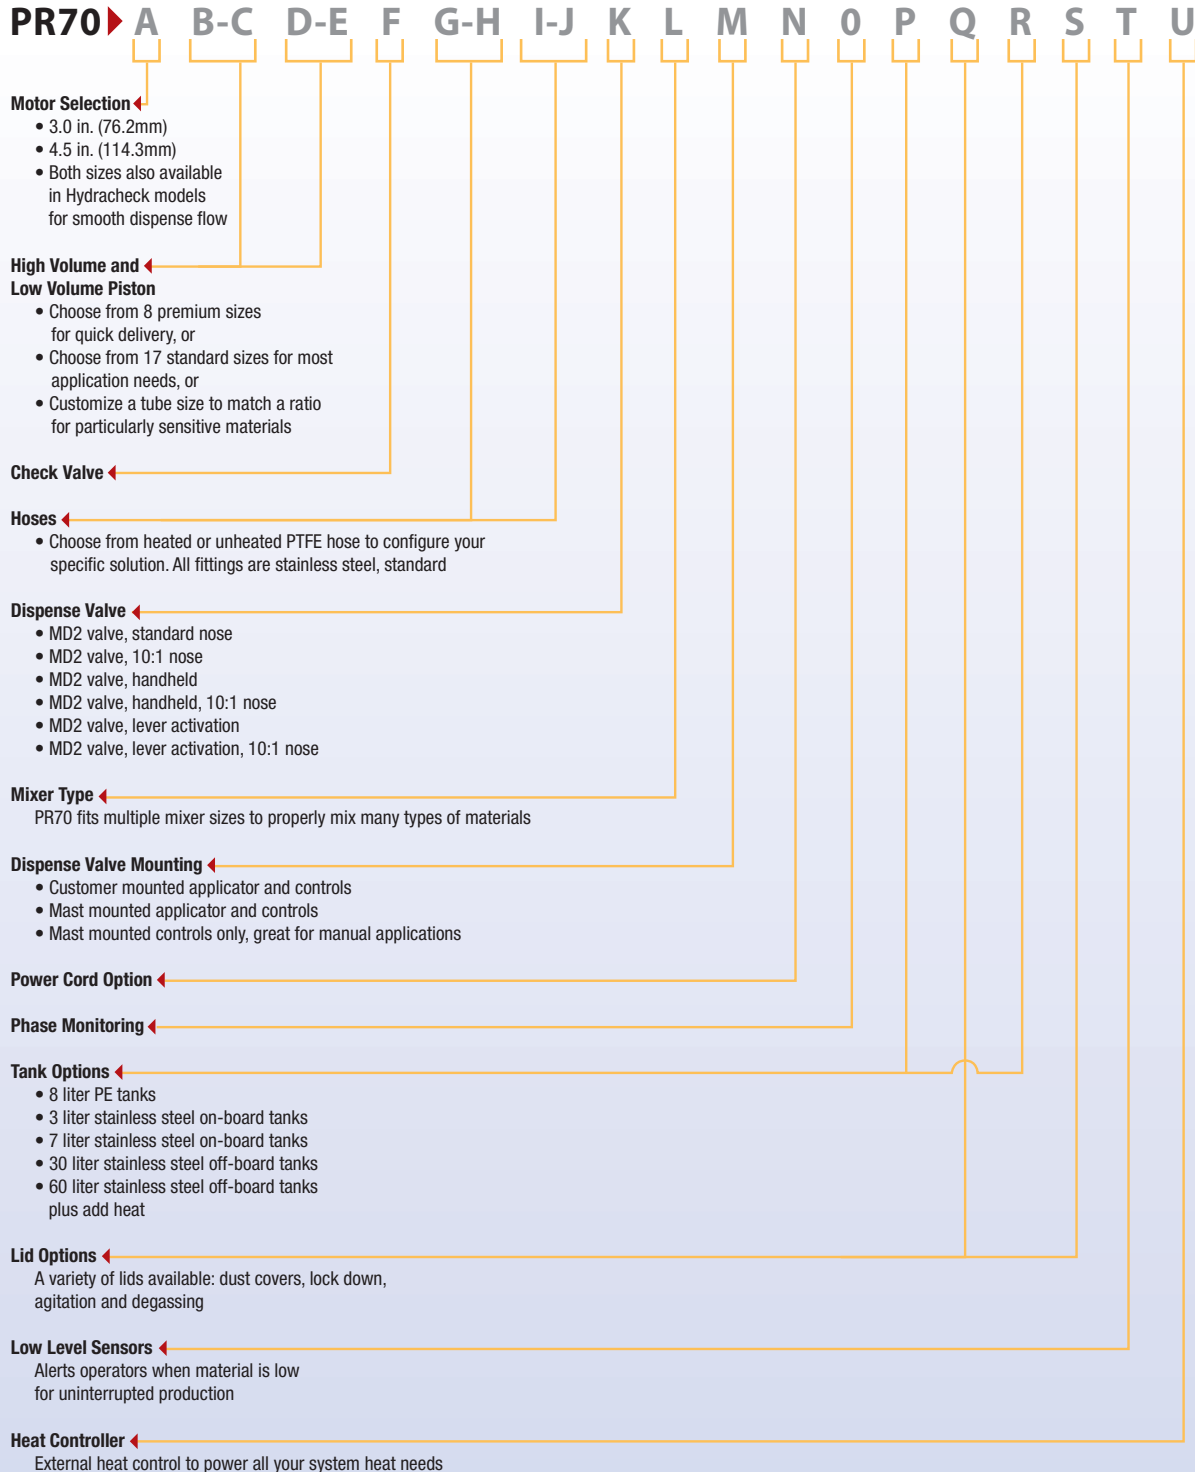

# Technical Specifications & Ordering Information

Metering Pump Effective Area	0.124 – 1.49 in <sup>2</sup> (80 – 960 mm <sup>2</sup> ) per side
Small Air Cylinder Effective Area	7.07 in <sup>2</sup> (4560 mm <sup>2</sup> )
Large Air Cylinder Effective Area	15.9 in <sup>2</sup> (10260 mm <sup>2</sup> )
Maximum Stroke Length	1.50 in (38.1 mm)
Minimum Stroke Length	0.23 in (5.8 mm)
Volume per Cycle	0.12 – 4.3 in <sup>3</sup> (2 – 70 cc)
Pump Cycles per 1L (.26 gal)	500 – 14.3
Ratios (fixed)	1:1 to 12:1 depending on cylinders selected
Maximum Fluid Working Pressure	207 bar, 20.7 MPa, 3000 psi
Maximum Air Input Pressure	7 bar, 0.7 MPa, 100 psi
Maximum Cycle Rate	30 cpm
Maximum Operating Temperature	70 C (160 F) nylon pistons 50 C (120 F) UHMWPE pistons or PE tanks
Air Inlet Size	1/4 NPT(f)
Pump Fluid Outlet Size	-03, -04, -06, -08 or -12 JIC fittings for 3/16 in (4.8 mm), 1/4 in (6.4 mm), 3/8 in (9.5 mm), 1/2 in (12.7 mm), 3/4 in (19.1 mm) hoses
Wetted Parts	303/304, 17-4 PH, hard chrome, Chromex™, carbide, Chemical Resistant o-rings, PTFE, nylon, UHMWPE
Weight	120 Lbs (55 kg) typical with two 7.5 L tanks 330 Lbs (150 kg) typical with two 60 L tanks
Compressed Air	< 10 scfm typical (varies with cycle time)
Electrical Power	100-240V 50/60Hz 1 phase for machine – 80 watts 208–240V 50/60Hz 1 phase for heat – 11 kW max 120 or 240V 50/60Hz 1 phase for on-board agitators

## Instruction Manuals

PR70 Operational & Maintenance	312393
PR70 Tank/Feed System	312394
MD2	312185

PR70 machines and complete configured packages carry the CE mark.



## PR70 Accessories

### Mixer and Shroud Options

LC0057	Mixer, 1/4 (6.5mm) x 24, 10 mixers with shroud	LC0081	Mixer, 3/8 (9.8mm) Combo, 50 mixers
LC0058	Mixer, 3/8 (9.8mm) x 24, 10 mixers with shroud	LC0082	Mixer, 3/16 (4.8mm) x 32 Luer Lock, 50 mixers
LC0059	Mixer, 3/8 (9.8mm) x 36, 10 mixers with shroud	LC0083	Mixer, 1/4 (6.5mm) x 24 Luer Lock, 50 mixers
LC0063	Mixer, 3/16 (4.8mm) x 22, 10 mixers with shroud	LC0084	Mixer, 3/16 (4.8mm) x 32, 250 mixers
LC0060	Mixer, 3/8 (9.8mm) Combo, 10 mixers with shroud	LC0085	Mixer, 1/4 (6.5mm) x 24, 250 mixers
LC0061	Mixer, 3/16 (4.8mm) x 32 Luer Lock, 10 mixers with shroud	LC0086	Mixer, 3/8 (9.8mm) x 24, 250 mixers
LC0062	Mixer, 1/4 (6.5mm) x 24 Luer Lock, 10 mixers with shroud	LC0087	Mixer, 3/8 (9.8mm) x 36, 250 mixers
LC0077	Mixer, 3/16 (4.8mm) x 32, 50 mixers	LC0088	Mixer, 3/8 (9.8mm) Combo, 250 mixers
LC0078	Mixer, 1/4 (6.5mm) x 24, 50 mixers	LC0089	Mixer, 3/16 (4.8mm) x 32 Luer Lock, 250 mixers
LC0079	Mixer, 3/8 (9.8mm) x 24, 50 mixers	LC0090	Mixer, 1/4 (6.5mm) x 24 Luer Lock, 250 mixers
LC0080	Mixer, 3/8 (9.8mm) x 36, 50 mixers		

### MD2 Valve Kits

255220	MD2, Convert Soft Seat nose to hard seat (Hard Seat rebuild), needle and nose	255218	MD2, kit rebuild, back-end of wet section (no needle or seat)
255219	MD2, Soft Seat rebuild, needle and nose	255217	MD2, Kit rebuild, air cylinder

### Other Accessories

LC0097	Desiccant Dryer, 3/8 in. NPT with adapter and cartridge	LC0091	3.0 in. Air Cylinder Rebuild Kit
LC0098	Desiccant Dryer Refill Cartridge	LC0092	4.5 in. Air Cylinder Rebuild Kit
LC0095	Nitrogen Kit for 30L and 60L tank, 1 tank	LC0093	Check Valve Rebuild Kit
LC0096	Nitrogen Kit for 30L and 60L tank, 2 tanks	LC0094	Rear Pump Seal Rebuild Kit
LC0008	Cord, I/O interface with footswitch port	LCC-XXX	Replacement Cylinder (XXX is area of Cylinder, marked on OD)
LC0099	Vacuum Transfer Pump, 120V, down to 25 Torr	LCF-XXX	Nylon Piston Rebuild Kit (XXX is area of Cylinder, marked on OD)
LC0100	Vacuum Transfer Pump, 240V, down to 25 Torr	LCE-XXX	UHMWPE Piston Rebuild Kit (XXX is area of Cylinder, marked on OD)



## ABOUT GRACO

### PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

## GRACO LOCATIONS

### MAILING ADDRESS

P.O. Box 1441  
Minneapolis, MN 55440-1441  
Tel: 612.623.6000  
Fax: 612.623.6777

### AMERICAS

#### MINNESOTA

Worldwide Headquarters  
Graco Inc.  
88-11th Avenue N.E.  
Minneapolis, MN 55413

### EUROPE

#### BELGIUM

European Headquarters  
Graco N.V.  
Industrieterrein-Oude Bunders  
Slakweidestraat 31  
3630 Maasmechelen,  
Belgium  
Tel: 32.89.770.700  
Fax: 32.89.770.777

### ASIA PACIFIC

#### AUSTRALIA

Graco Australia Pty Ltd  
P.O. Box 558  
Level 2 / 541 Blackburn Rd.  
Mount Waverley VIC 3149  
Australia  
Tel: 61.3.9550.0848  
Fax: 61.3.9550.0816

#### CHINA

Graco Fluid Equipment  
(Shanghai) Co. Ltd.  
Room 118 1st Floor  
No.2 Xin Yuan Building  
No.509 Cao Bao Road  
Shanghai, P.R. China 200233  
Tel: 86.21.649.50088  
Fax: 86.21.649.50077

### INDIA

Graco Hong Kong Ltd.  
India Liaison Office  
Room 103, Level 4, Augusta Point  
Golf Course Road  
Gurgaon, Haryana, India 122001  
Tel: +91.124.435.4208  
Fax: +91.124.435.4001

### JAPAN

Graco K.K.  
1-27-12 Hayabuchi  
Tsuzuki-ku  
Yokohama City, Japan 2240025  
Tel: 81.45.593.7300  
Fax: 81.45.593.7301

### KOREA

Graco Korea Inc.  
Choheung Bank Building  
4th Floor #1599  
Gwanyang-Dong, Dongan-Ku,  
Anyang-Si, Gyeonggi-Do,  
Korea 431-060  
Tel: 82(Korea).31.476.9400  
Fax: 82(Korea).31.476.9801

## SALES/DISTRIBUTION/SERVICE

Call today for product information or to request a demonstration.

**1.877.84GRACO (1-877-844-7226)** or visit us at [www.graco.com](http://www.graco.com).

Graco Inc. is registered to I.S. EN ISO 9001

Graco Ohio  
Customer Service  
330-966-3000  
FAX 330-966-3006